


PIG Large Mobile Roof Leak Diverter Kit

Instructions

- Step 1** – Install the ceiling leak diverter using the instructions provided with the diverter.
- Step 2** – Run the leak-diverter hose so that it easily attaches to the fittings in the top of mobile catch container. The catch container can be placed away from foot traffic in an out-of-the-way location against a wall or support structure. Standard 3/4" hose thread fittings are provided with this kit to accommodate a garden hose if you need a longer length for your application.
- Step 3** – Install the provided garden hose adapter to the fitting on the lid of the container.
- Step 4** – Attach the second garden hose adapter to the valve at the base of the unit, making sure the valve is shut for operation.
- NOTICE:** Vibration from shipping may loosen preinstalled fittings. Check all fittings before final installation to make sure you have leakproof seal at all connection points.
- Step 5** – Attach the supplied zip-tie fastener through the small hole in the front of the lid and secure. This prevents the catch container from being used as a trash can.
- Step 6** – Attach the leak-diverter hose to the fitting on the top of the lid. Hand tighten to create a leakproof seal.
- Step 7** – There are two ways to drain the catch container: 1) detach the diverter hose from the lid, position the container over a drain and open the valve; 2) attach a hose to the valve, extend it to a drain and open the valve.

WARNING: DO NOT OVERFILL THE CONTAINER, THE LID IS NOT WATERTIGHT AND WATER MAY SPLASH OUT WHEN MOVED. (30 gallon maximum capacity)

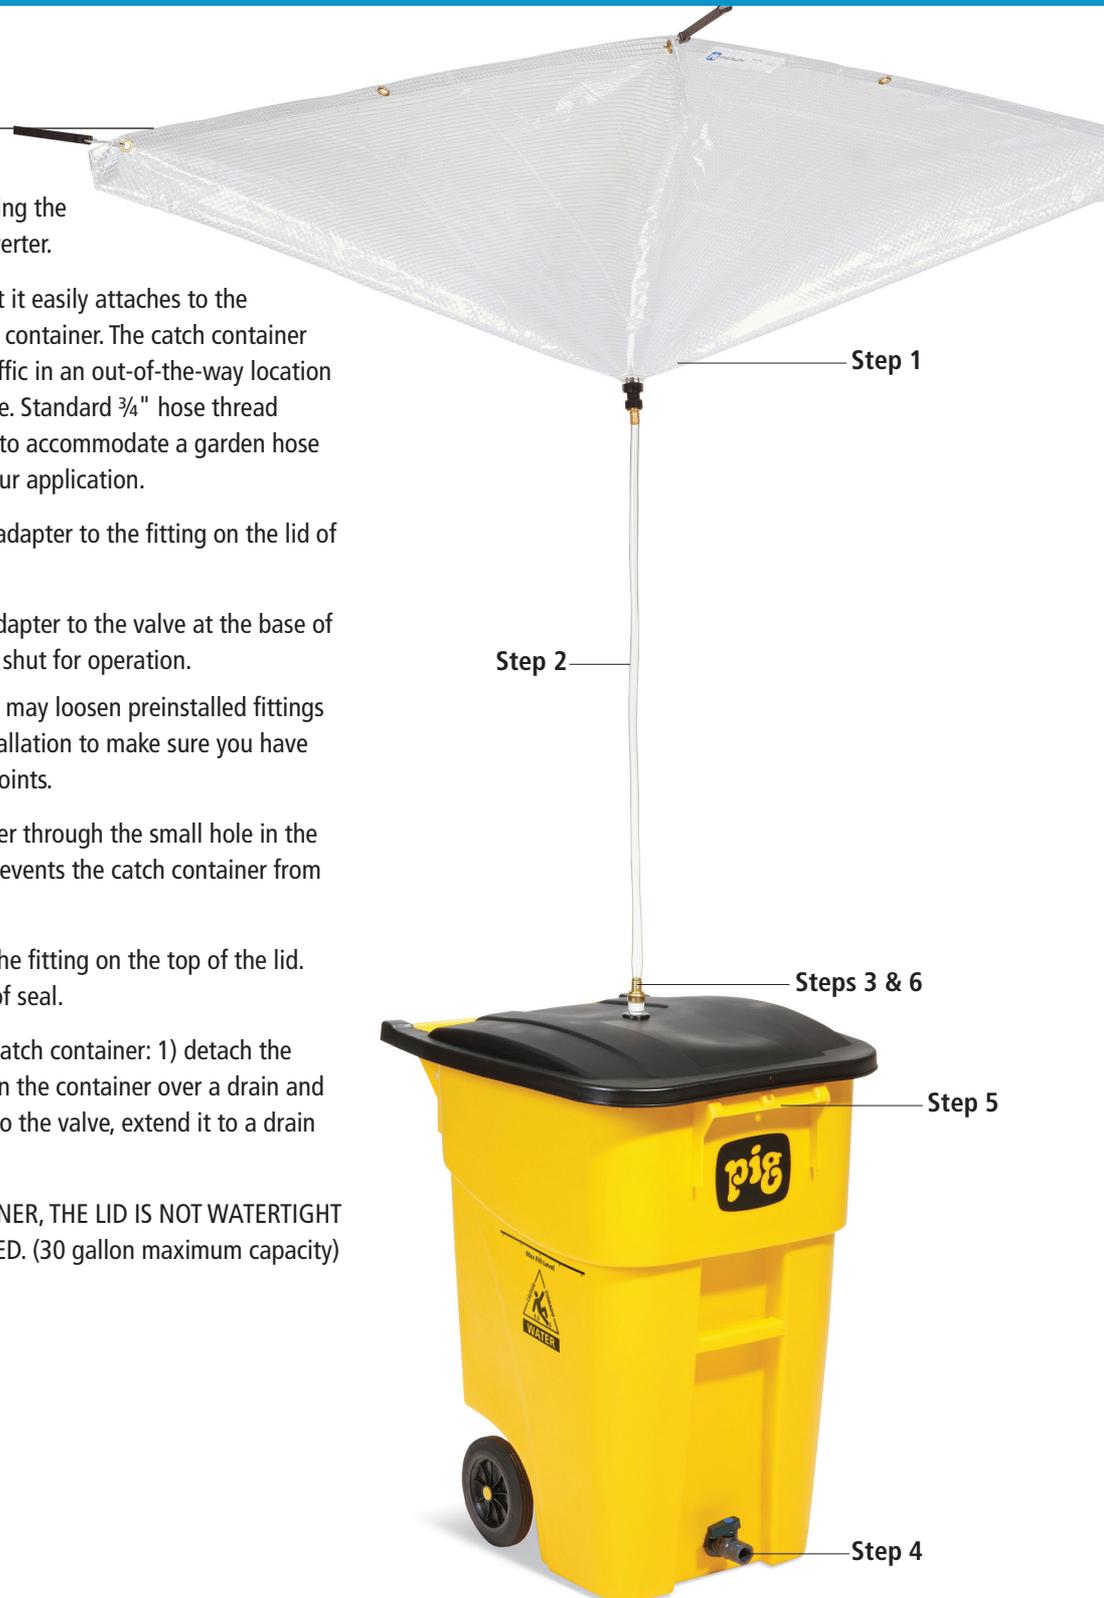

New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

China: **+86-21-400 921 5178**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**

166093 / 360452