

Installation and Maintenance Instructions

NoTrax[®] Modular Lok-Tyle[™]

The guide on the following page(s) was provided by the supplier. New Pig Corporation assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information.



New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

China: **+86-21-400 921 5178**

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com


356838

523 Modular Lok-Tyle™ T47 Plasti-Tile® Installation Instructions

Installation: It's a Snap!

Each tile has sockets on 2 adjacent sides and pins under the remaining 2 sides (Figure No. 1). To assemble your tile surface, make sure that each tile is facing the same direction as your first one. Continue to install the tiles one row at a time, snapping sockets onto pins. At the end of each row beveled ramps can be added, or if ramps are not needed, the sockets can be removed by using a razor knife or wire snips.


The 523 Modular Lok-Tyle™/T47 Plasti-Tile® has been re-designed with a smaller female socket which makes it more difficult to snap together by hand. This was done to ensure that tiles, once connected, will not come apart easily. You will need to assemble the tiles upside down and use a hammer or mallet to tap the locks in. You will be able to loosely roll up the assembled mat to flip it over when complete.

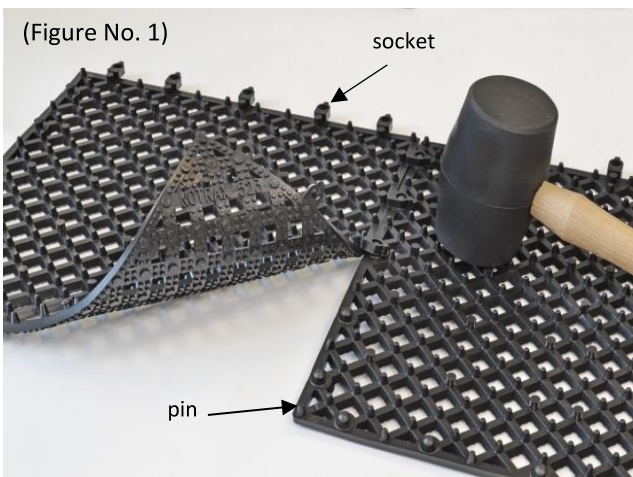

Beveled Ramps: For safety and good looks

Once you have finished assembling your tile surface, beveled ramps can be installed along entrances or along the entire border. The ramps snap into the underside of the mats that are flush. For sides that have sockets showing, the beveled ramps must be cut to expose the pins underneath (Figure No. 2). Corner pieces should never be altered.

(Figure No. 2)

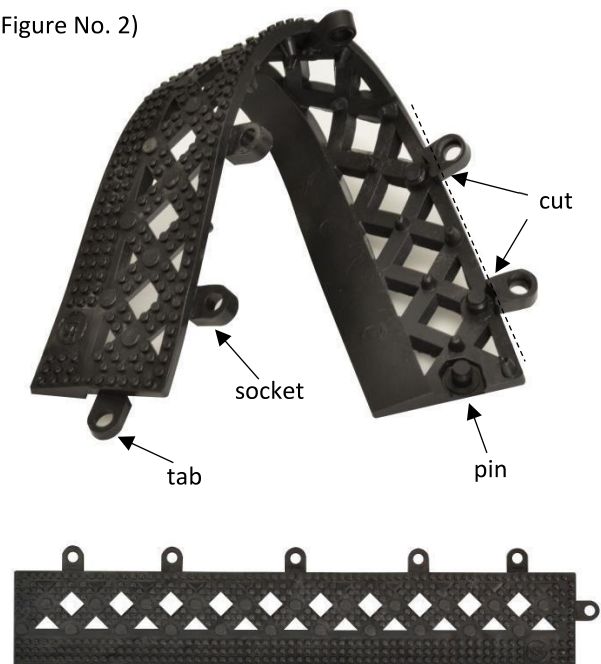

Maintenance: Fast and easy

Your tile surface can be cleaned by hosing, steaming, or rinsing with soapy water. A large surface may be moved for cleaning by rolling up or partially disassembling it. Tiles will snap back together after cleaning.