# PIG Industrial Absorbent Adhesive-Backed Grippy Floor Mat

This report is offered as a guide and was developed from information which, to the best of New Pig's knowledge, was reliable and accurate. Due to variables and conditions of application beyond New Pig's control, none of the data shown in this guide is to be construed as a guarantee, expressed or implied. New Pig assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information.

New Pig
One Pork Avenue
Tipton, PA 16684-0304


**newpig.com**
North America: **1-800-468-4647**
Europe: **+31 (0)76 596 92 50**
China: **+86-21-400 921 5178**
UK: **0800 919 900**
Outside North America: **+1-814-684-0101**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

Industrial Absorbent Adhesive-Backed Grippy Floor Mat


# Quick Start Guide

## Installation

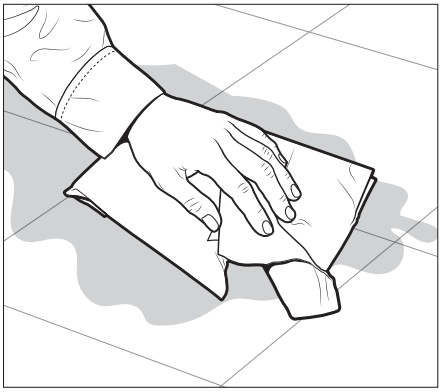


### 1. Prepare Floor

Clean and dry your floor so Grippy Mat will properly adhere.

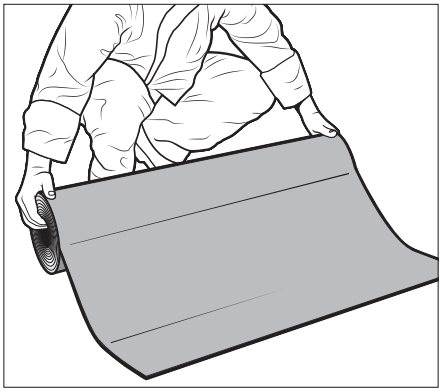

### 2. Roll Out Mat & Cut to Size


Position mat, unroll and cut to size using the Safety Knife and Utility Board.

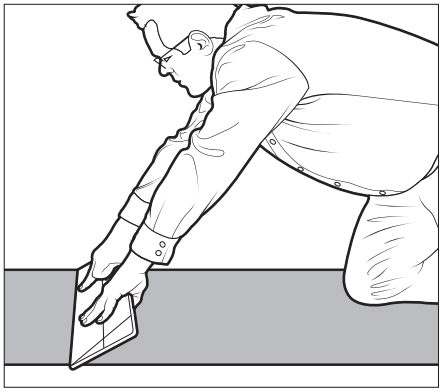

### 3. Stick It Down


Smooth out mat and press it into place using the Utility Board.

## Care & Maintenance

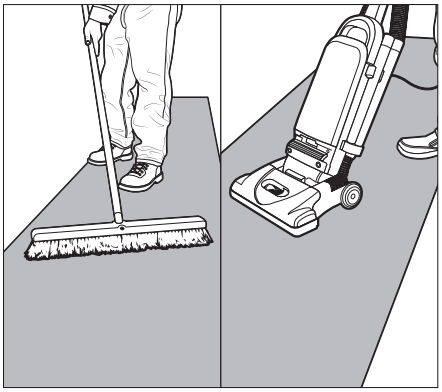

### Everyday Cleaning

Sweep or vacuum according to your protocols.

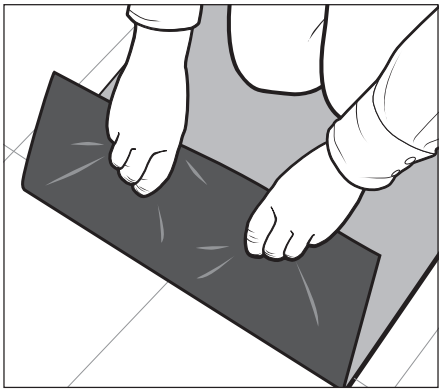

### ! Removal & Changeouts

Replace mat when worn or bond to floor is weakened. Peel up a corner and pull at a 45° angle. For long runs, cut mat every 10'.

**New Pig Adhesive-Backed Mat Notice:** New Pig Adhesive-Backed Mats are formulated to work with most common hard-floor surfaces. New Pig Adhesive-Backed Mats are not intended for use on wood flooring with stains, finishes, or coatings. New Pig Adhesive-Backed Mats have non-permeable barrier layers to prevent liquid pass-through and, as such, are considered to be non-breathable and may not be suitable for use on surfaces that require air curing, including, but not limited to, newly poured concrete or recently applied coatings, sealants, and finishes. All adhesive mats have some potential to leave residue, lift and/or discolor 1) surface finish, 2) surface coating, 3) paint, 4) loose or previously damaged tiles.

For these reasons and others, if you have questions about the suitability of New Pig Adhesive-Backed Mats for your application, test a small section of mat in a discreet or non-critical area before using on larger areas. New Pig Adhesive-Backed Mats are designed for use for up to 3-6 months in commercial and general public environments, depending on conditions and traffic patterns. Customers should routinely inspect deployed New Pig Adhesive-Backed Mats for signs of wear or damage. New Pig Adhesive-Backed Mats should be replaced immediately if they show signs of wear or damage and should always be replaced in commercial and general public environments no later than 6 months after installation..

The stitching on the mat may begin to fray after an extended period of time of intense use, and may indicate that the mat is due for replacement. Fraying will not affect the absorbency or adhesion of the mat.

CUSTOMER ASSUMES THE RISK THAT A NEW PIG ADHESIVE-BACKED MAT MAY DAMAGE OR ALTER CUSTOMER'S EXISTING FLOORING OR FLOOR COVERING. NEW PIG PROVIDES NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND NO WARRANTY THAT THE USE OF AN ADHESIVE-BACKED MAT WILL BE ACCEPTABLE FOR USE ON CUSTOMER'S FLOORING OR ANY OTHER SURFACE. NEW PIG SHALL HAVE NO RESPONSIBILITY FOR, AND CUSTOMER HEREBY RELEASES AND DISCHARGES NEW PIG FROM, ANY DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES TO OR RELATED TO CUSTOMER'S FLOORS, FLOORING MATERIAL, OR ANY OTHER SURFACES IN CUSTOMER'S DWELLING OR FACILITY. CUSTOMER IS SOLELY RESPONSIBLE FOR DETERMINING THE FITNESS AND APPROPRIATENESS OF THE USE OF A NEW PIG ADHESIVE-BACKED MAT IN CUSTOMER'S DWELLING OR FACILITY.