


# PIG Stormwater Filter Sock

**Note Before Installation:** Powder and fine dust may escape during transport. To prevent the fines from going down drains, rinse the PIG Stormwater Filter Sock on grass or in a vegetated area before use for best results. Spray the sock for 30 seconds for every linear foot (2 ½ minutes for a 5' Sock). Carefully handle the sock to prevent further fine development prior to placement and use.

## INSTRUCTIONS

1. Orient the handles toward the source of the pollution.
2. Fully surround the drain or object with socks. The socks should lay flat, with both chambers on the ground.

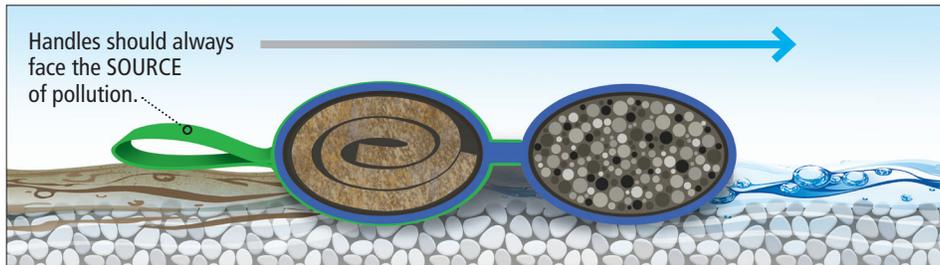

**Proper Installation** – To increase efficiency and product lifespan, the green handles should always face the source of pollution.



Source Pollution Removal (handles toward source of pollution)



When using multiple units, the socks should be run continuously, without gaps. The easiest way to accomplish this is to overlap the socks (fig. A) or stack them on top of each other (fig. B).



90° bends can be accomplished by creating a crease in the inner chamber (fig. C & D)



**New Pig**

One Pork Avenue  
Tipton, PA 16684-0304

**newpig.com**

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

China: **+86-21-400 921 5178**

PIG, PIG logo are registered trademarks in USA and other countries. See [tm.newpig.com](http://tm.newpig.com).

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**