


PIG High Flow Roof Leak Diverter

Hanging Instructions



1. Identify the structure from which you'll hang the Leak Diverter.
2. Feed hanging straps (not included) through grommets, one at a time, as you hang each corner.
3. Hang the diverter as level as possible to create the proper drainage.
4. Position end of drainage hose into a drain or container.

NOTE: If your configuration requires the hose to travel down and then across a horizontal surface, crimping may occur during use. Please follow Elbow Assembly Instructions below to maintain maximum flow. (90° Elbow included)

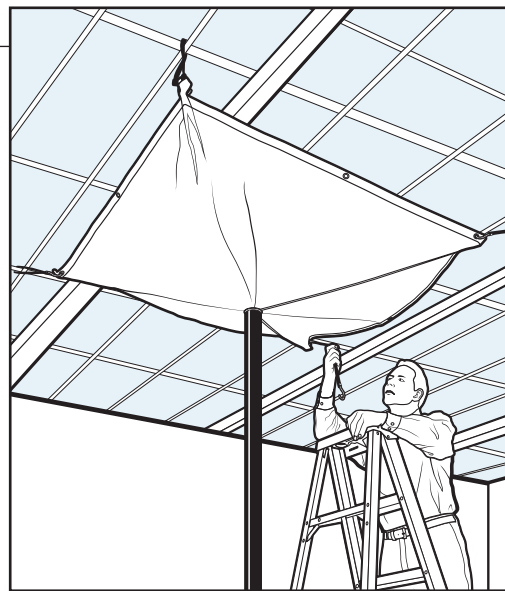

Elbow Assembly Instructions

1. Cut flat hose slightly above ground level or pinch point.
2. Place hose clamp over hose end.
3. Stretch hose to fit over barbed 90° elbow fitting.
4. Place hose clamp over the elbow fitting and hose; tighten with a flat-head screwdriver.
5. Repeat Steps 2 through 4 to attach other end of hose.

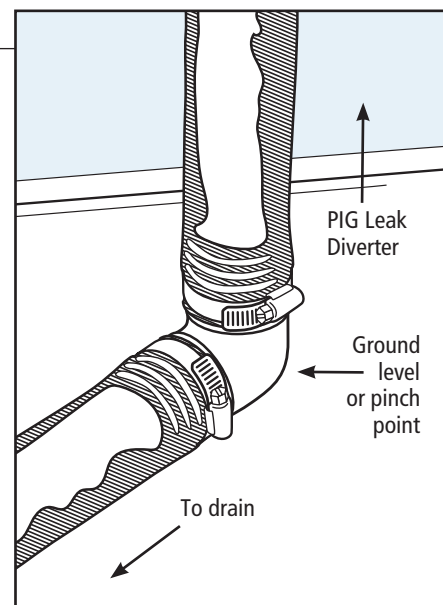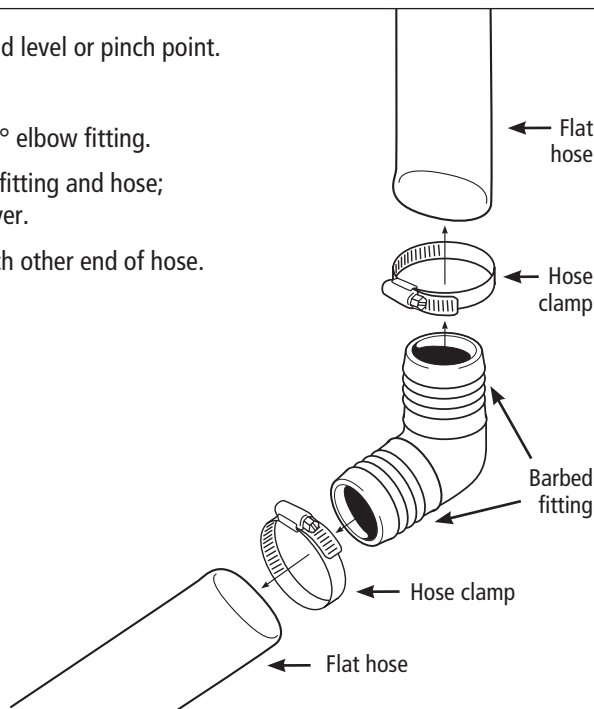

New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

China: **+86-21-400 921 5178**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**

502876 / 360287