

PIG® Drive-Over DRAINBLOCKER® Modular Drain Cover Instructions

Installing Cover

1. Sweep the area surrounding the drain and remove debris to ensure a proper seal. (Fig. 1)
2. Remove the clear protective film from the product and set aside for reuse. (Fig. 2)
3. Place product over the drain, tacky side down, making sure it overlaps all sides of the drain by at least 3 inches. (Fig. 3)



FIG. 1

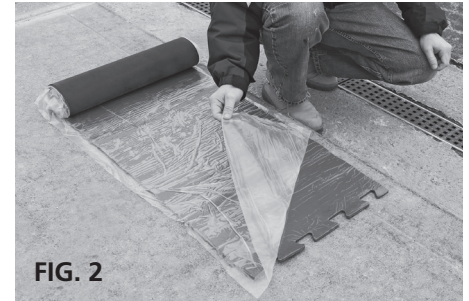


FIG. 2

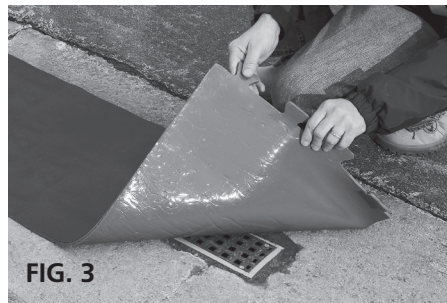


FIG. 3

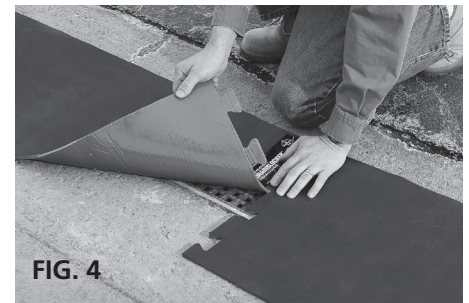


FIG. 4

Connecting Modular Units

4. Align dovetail connectors. (Fig. 4)
5. Apply pressure along connectors to secure the seal. (Fig. 5)

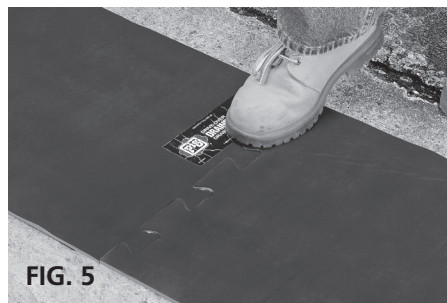


FIG. 5



FIG. 6

Uninstalling and Storing Cover

6. To remove, lift product and clean with mild soap and water. (Fig. 6)
7. When the product is completely dry, replace the protective film and return to box the same way it was packaged. Store away from direct sunlight.

Important Notes:

- Product performs best on flat, smooth surfaces free of holes, cracks and other damage
- Never store without protective film in place, or urethane may bond to itself
- Flexibility and seal diminish at temperatures below -30°F
- Inspect regularly when left down for long periods or in areas with heavy or frequent traffic
- Do not store in areas with continuous high humidity or use where temperature exceeds 120°F
- Some chemicals will degrade this product over time; refer to the chemical resistance guide for information
- If urethane swells or degrades after a spill response effort involving incompatible liquids, the product should be disposed of with other spill response materials

The PIG® Drive-Over DRAINBLOCKER® Drain Cover is an excellent spill response tool for these and many other chemicals.

Acetone	Methyl Ethyl Ketone
Dichloromethane	Methylene Chloride
Ethyl Acetate	Naphtha
Gasoline	Perchloroethylene
Glycol Ether	Sodium Hydroxide
Hexane	Sodium Hypochlorite
Hydrochloric Acid	Sulfuric Acid
Hydrogen Peroxide	Toluene
Jet Fuel (JP-5)	Trichloroethylene
Kerosene	Turpentine
Methanol	

Still have questions? In North America contact us:



By Phone:
1-800-HOT-HOGS® (468-4647)

Online:
newpig.com

Email:
hothogs@newpig.com

One Pork Avenue • Tipton, PA 16684-0304

173984 / VL-416