




NOTES:

- PIG® Leak Diverter needs to be checked periodically for debris caught in diverter. Foreign materials can clog diverter
- PIG® Leak Diverter is not intended to use for temperatures above 190 degrees.



STEP 1

Unpack and remove clear vinyl leak diverter with tubular frame supports from box. Set two smaller tubular frame supports off to side. Read through instructions prior to proceeding.

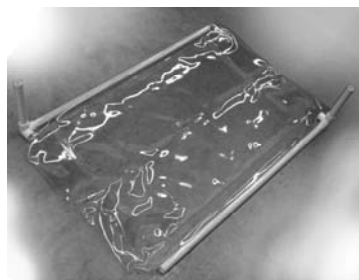

STEP 2

Open diverter and lay flat on sturdy surface with leg supports pointing up.



STEP 3

Locate end pockets on corners of diverter and slide smaller tubular frame support into pocket. Repeat for remaining support.




STEP 4

Grasping corner support, insert smaller tubular end into "Y" connection. Seat end of smaller tubular frame supports for proper support. Repeat other side.



STEP 4

Locate enclosed barbed fitting and two clamps. Slide clamps onto hose and drain valve that is attached to diverter. Push barbed fitting into end of hose and drain valve until fully seated.

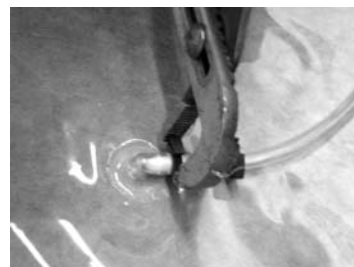

STEP 5

Slide clamps over fitting and pinch clamps using pliers to secure clamp onto hose and fitting.



STEP 6

Flip assembled diverter over with the legs down on a flat surface and adjust so all 4 legs become level.



STEP 7

Position diverter on top of suspended ceiling under a leaking area. Run hose to a drain or collection container. Note: hose needs to be lower than diverter for proper draining. An optional tie strap has been provided to secure hose to stationary object.