



CREATING SECONDARY CONTAINMENT IN AN EXISTING ROOM

SEALED WALLS AND WALL/FLOOR JOINTS SEALED

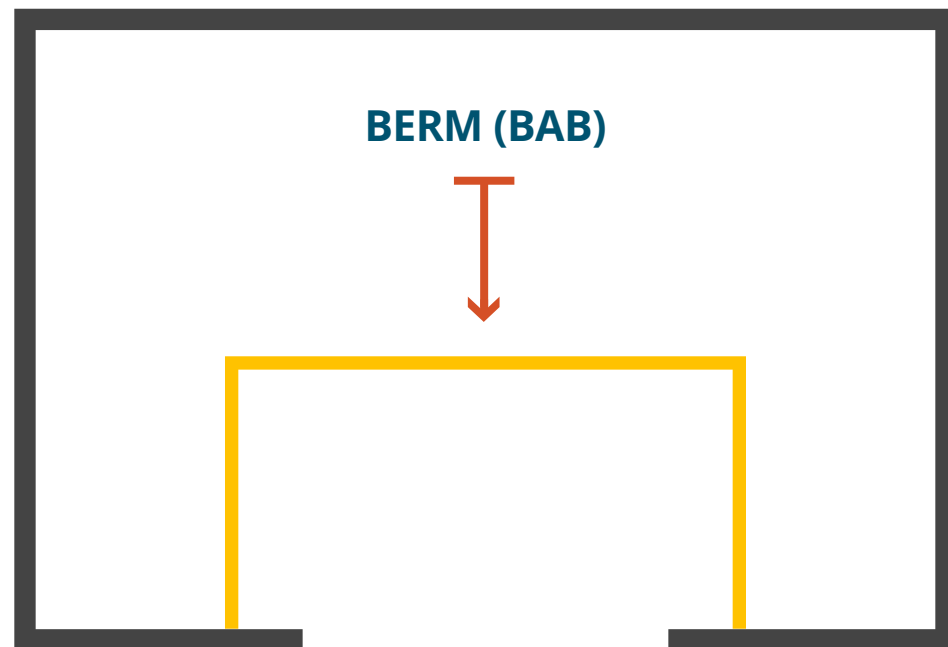

UNSEALED WALLS AND/OR UNSEALED WALL/FLOOR JOINTS

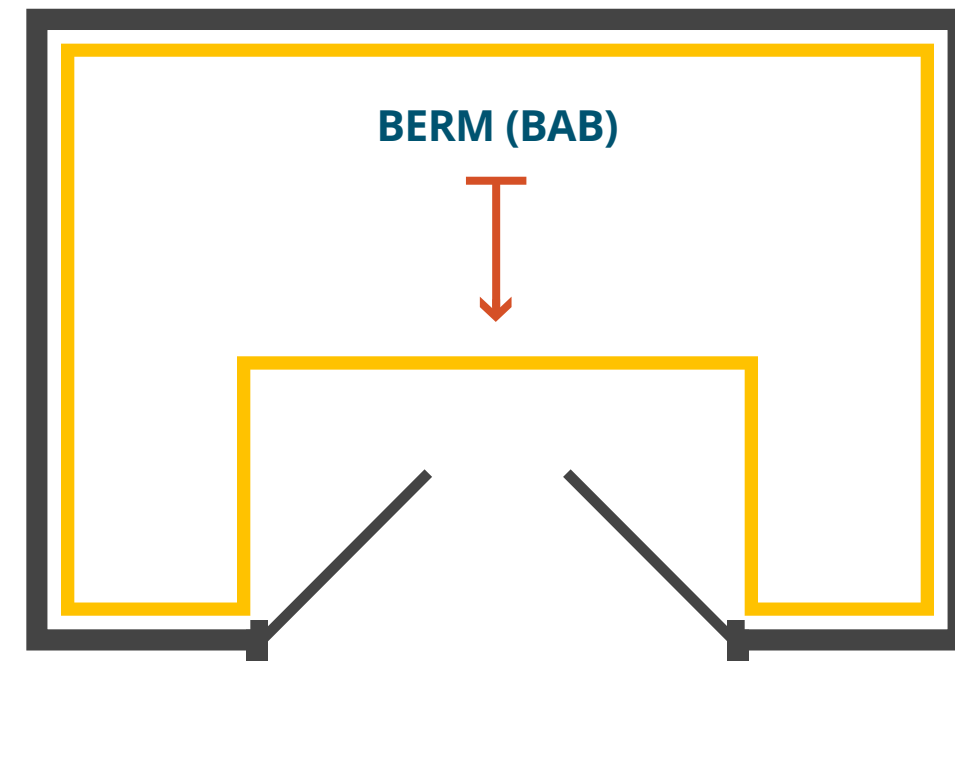

SEALED FLOORS PREVENT LIQUIDS FROM PENETRATING

Build-A-Berm (BAB) Barriers [shown in yellow] allow forklift, hand cart and other wheeled traffic to enter and exit the secondary containment area easily. Ramps and rigid barriers can also be used to create secondary containment systems in existing rooms.